



SPECIFICATION FOR LCD MODULE

Customer : _____
CustomerP/N _____
Model No. : H3950012AH
Version : A0
Date : 2024-12-23

Final Approval by Customer

LCM Machinery OK <input type="checkbox"/>	Checked By	
LCM Display OK <input type="checkbox"/>	Checked By	
LCM NG <input type="checkbox"/> LCM OK <input type="checkbox"/>	Approved By	

ShenZhen XR Confirmed :

DESIGN	CHECK	APPROVAL



LIST OF CONTENTS

No.	CONTENTS	PAGE
1	REVISION HISTORY	
2	GENERAL INFORMATION	
3	ABSOLUTE MAXIMUM RATINGS	
4	DC ELECTRICAL CHARACTERISTICS	
5	TIMING CHARACTERISTICS	
6	RESET TIMING	
7	EXTERNAL DIMENSIONS	
8	INTERFACE SIGNALS	
9	ELECTRO-OPTICAL CHARACTERISTICS	
10	RELIABILITY TEST CONDITIONS	
11	INSPECTION CRITERION	
12	PRECAUTINGS FOR USING LCD MODULES	



1. REVISION HISTORY

Version	Date	Description	Revised By
A0	2024-12-23	First Issued	



2 GENERAL INFORMATION

Item	Specification	Unit
LCD size 液晶面板尺寸	3.95	inch
Display Mode 显示模式	Normally Black	--
Resolution 分辨率	480(RGB)x480	Pixel
Pixel pitch 像素尺寸	0.1497(H)x3 x 0.1462(V)	um
Pixel Arrangement 像素排列	RGB Vertical Stripe	
Viewing direction 视角	ALL	-
Module outline dimension	84.20(H)*84.20 (V)*2.97(D)	mm
LCD AA 液晶显示区域	71.86 (H)* 70.18 (V)	mm
TP VA 触摸可视区域	72.26 (H)* 70.58 (V)	mm
Colors 颜色深度	16.7M	-
Weight 重量(TP+LCM)	-	g
Driver IC 驱动芯片	ST7102	-
Driver IC RAM Sise 记忆体	-	-
Interface 接口类型	RGB18BIT	--
Backlight 背光类型	White LED	--
Touch IC 触摸芯片	-	--
Surface hardness 表面硬度	6H	--
支持点数	5点	--
Touch structure 触摸结构	G+LCM	--
Cover lens 盖板	旭硝子	--
Colors 颜色	黑色	--
Operating Temperature 工作温度	-20℃~ +70℃	--
Storage Temperature 存储温度	-30℃~ +80℃	--
环保要求	ROHS	--



3 ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Min	Max	Unit	Note
Power Supply voltage 1	VCI~GND	-0.3	+6.5	V	
Power Supply voltage 2	IOVCC~GND	-0.3	+5.5	V	
Logic Input Voltage Range	V _{IN}	-0.3	IOVCC+0.3	V	
Logic Output Voltage Range	V _O	-0.3	IOVCC+0.3	V	

* The absolute maximum rating values of this product are not allowed to be exceeded at any times. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

4 DC ELECTRICAL CHARACTERISTICS

4.1 Driving TFT LCD Panel

AGND = GND = 0V, Ta = 25°C

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage for analog circuit	VCI	2.5	2.8	3.3	V
Supply voltage for logic circuit	IOVCC	1.65	1.8	2.0	V
Input voltage 'H'level	V _{IH}	0.7*IOVCC	—	IOVCC	V
Input voltage 'L'level	V _{IL}	GND	—	0.3*IOVCC	V
Output voltage 'H'level	V _{OH}	0.8*IOVCC	—	IOVCC	V
Output voltage 'L'level	V _{OL}	GND	—	0.2*IOVCC	V

4.2 Backlight Characteristics

Ta = 25°C

Item	Symbol	Min	Typ	Max	Unit	Condition
Forward voltage	V _f	12	12.4	12.8	V	I _f =40 mA
Number of LED	-	2X4			Piece	-
Connection mode	S/P	4Serial/2Parallel			-	-

Using condition: constant current driving method I_f= 2×20mA (+/-10%)



5 TIMING CHARACTERISTICS

5.1 RGB Interface Characteristics

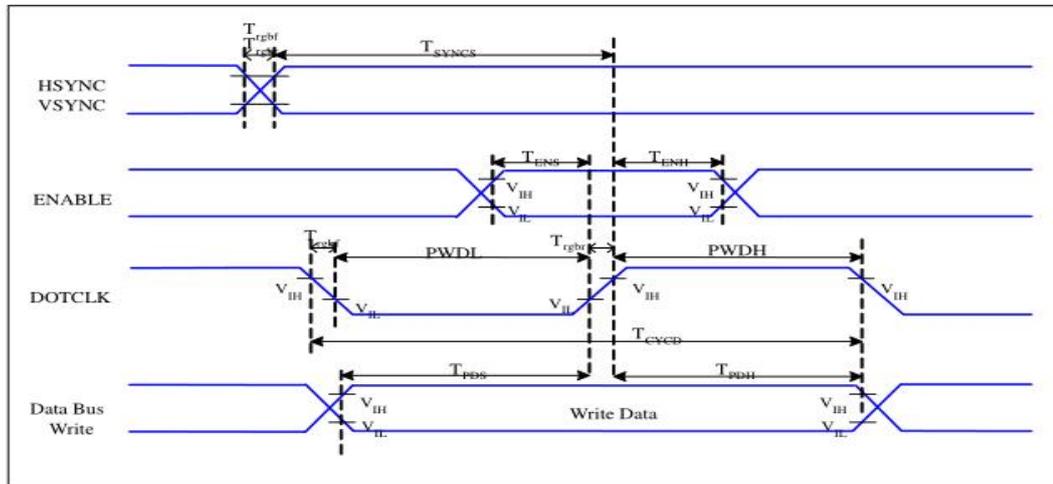


Figure5.1.1 RGB Interface Timing Characteristics

VDDI=1.65 to 3.3V, VDD=2.4 to 3.3V, AGND=DGND=0V, Ta=25°C


Signal	Symbol	Parameter	MIN	MAX	Unit	Description
HSYNC, VSYNC	T _{SYNCS}	VSYNC, HSYNC Setup Time	30	-	ns	
ENABLE	T _{ENS}	Enable Setup Time	25	-	ns	
	T _{ENH}	Enable Hold Time	25	-	ns	
DOTCLK	PWDH	DOTCLK High-level Pulse Width	60	-	ns	
	PWDL	DOTCLK Low-level Pulse Width	60	-	ns	
	T _{CYCD}	DOTCLK Cycle Time	120	-	ns	
	Trghr, Trghf	DOTCLK Rise/Fall time	-	20	ns	
DB	T _{PDS}	PD Data Setup Time	50	-	ns	
	T _{PDH}	PD Data Hold Time	50	-	ns	

Figure5.1.2 18/16 Bits RGB Interface Timing Characteristics

Signal	Symbol	Parameter	MIN	MAX	Unit	Description
HSYNC, VSYNC	T _{SYNCS}	VSYNC, HSYNC Setup Time	35	-	ns	
ENABLE	T _{ENS}	Enable Setup Time	35	-	ns	
	T _{ENH}	Enable Hold Time	35	-	ns	
DOTCLK	PWDH	DOTCLK High-level Pulse Width	35	-	ns	
	PWDL	DOTCLK Low-level Pulse Width	35	-	ns	
	T _{CYCD}	DOTCLK Cycle Time	80	-	ns	
	Trghr, Trghf	DOTCLK Rise/Fall time	-	10	ns	
DB	T _{PDS}	PD Data Setup Time	35	-	ns	
	T _{PDH}	PD Data Hold Time	35	-	ns	



6. Reset Timing

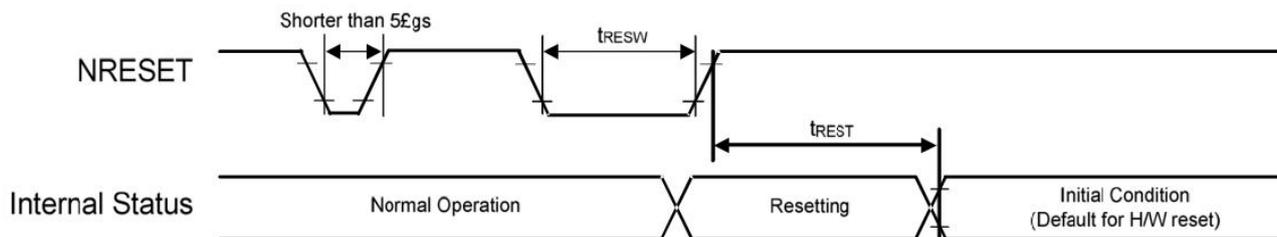


Symbol	Parameter	Related Pins	Spec.			Note	Unit
			Min.	Typ.	Max.		
tRESW	Reset low pulse width ⁽¹⁾	NRESET	10	-	-	-	µs
tREST	Reset complete time ⁽²⁾	-	15	-	-	When reset applied during SLPIN mode	ms
		-	120	-	-	When reset applied during SLPOUT mode	ms

Notes:

- The reset cancel includes also required time for loading ID bytes, VCOM setting and other settings from NVM (or similar device) to registers. This loading is done every time when there is HW reset cancel time (tREST) within 5 ms after a rising edge of NRESET .
- Spike due to an electrostatic discharge on NRESET line does not cause irregular system reset according to the table below:

NRESET Pulse	Action
Shorter than 5µs	Reset Rejected
Longer than 10µs	Reset
Between 5µs and 10µs	Reset starts

- During the Resetting period, the display will be blanked (The display is entering blanking sequence, which maximum time is 120 ms, when Reset Starts in Sleep Out –mode. The display remains the blank state in Sleep In –mode.) and then return to Default condition for Hardware Reset.
- Spike Rejection also applies during a valid reset pulse as shown below:

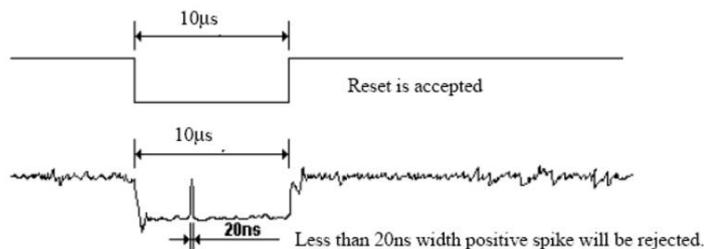


- It is necessary to wait 15msec after releasing NRESET before sending commands. Also Sleep Out command cannot be sent for 120msec.


7. EXTERNAL DIMENSIONS

Count drawing & Spec. revision record during discussion with customer		Revision content description	Date
Rec.	A0	FIRST ISSUE	2024-12-23


CG 效果图

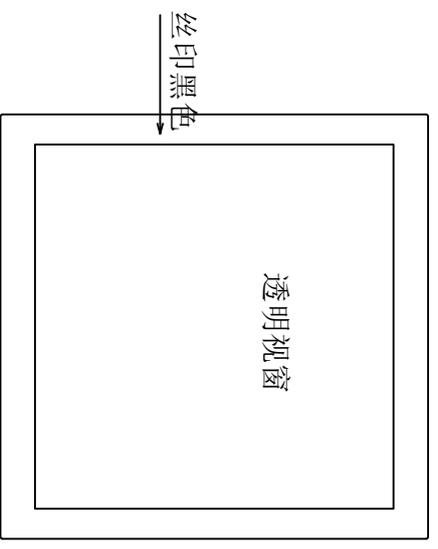


正视图

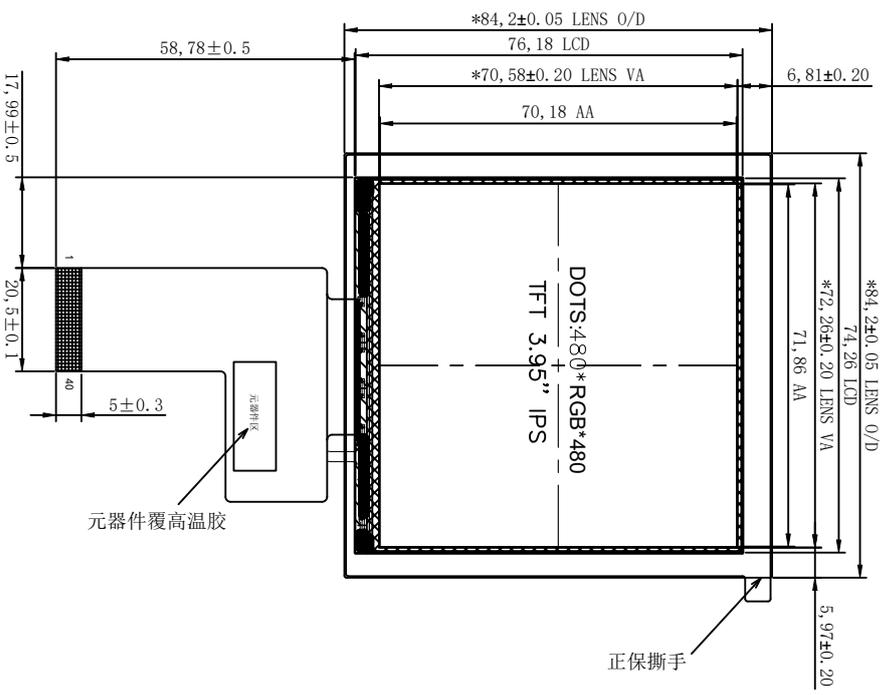

侧视图

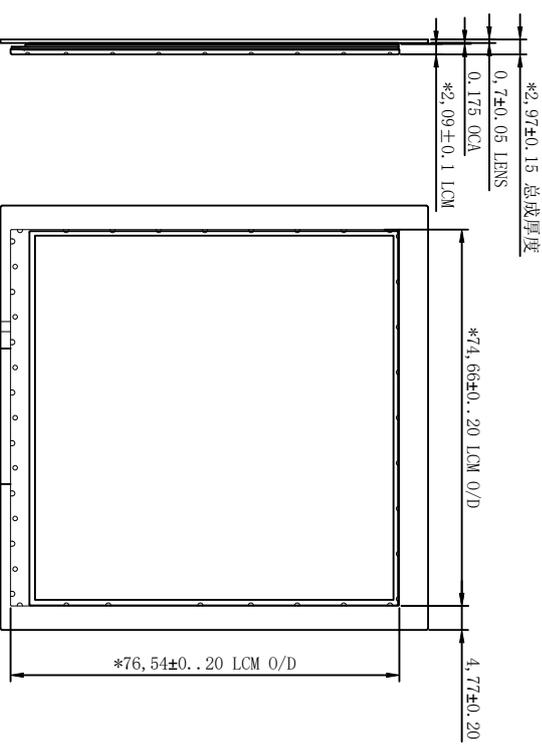


背视图

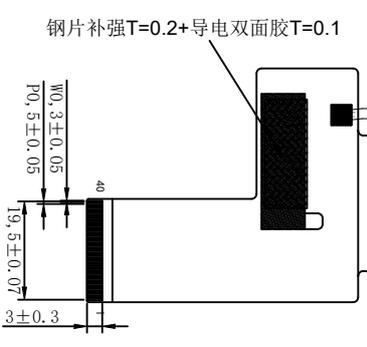

NOTE:
 1. Display mode: 3.95" TFT/ Transmissive/Normally Black
 2. Display Color: 16.7M
 3. Viewing Direction: Free
 4. Controller IC: ST17102
 5. Operating temperature: -20° C to +70° C
 Storage temperature: -30° C to +80° C
 6. LCM+CG(White):
 Brightness(centre point): 250cd/m² (MIN), 300cd/m² (TYP),
 Chromaticity(centre point): 0.30+/-0.03;0.31+/-0.03.
 Uniformity(9 AVG 1/6):80%(MIN);
 Backlight: 8 chips White LED
 7. Backlight: 8 chips White LED
 8. Unspecified tolerance:±0.20,“() ” reference dimension
 9. ROHS2.0 compliant

- 产品结构: G+LCM
- CG材质&表面硬度:旭硝子 & ≥6H (750g)
- 达因值: ≥32 dyn/cm (CG油墨面、Film非ITO面)
- 强化条件:强化深度≥8um, 强化应力≥450mpa
- 钢球冲击能量:55G钢球, 25CM高度 (0.15J) 冲击中心点三次, 需满足不破碎
- 油墨附着力和翘曲度&油墨厚度: <0.2mm; BLACK INK图层为黑色印刷;
- 工作温度:-20度到+70度; 存储温度:-30度到+80度
- 未注倒边: C=0.15*0.15;
- 符合ROHS标准;
- 保护膜不残胶, 不掉尘, 易贴附无汽泡, 防静电值介于10-11;
- 未注公差±0.20mm



INTERFACE	RGB Interface	MODEL NAME	PART NO.
FPC Connector		TFT Display Module	H3950012AH
VIEWING DIRECTION	ALL	DMN	REV. SHEET OF
Gray Scale DIRECTION	ALL	CHKD	40 1/1
		TOLERANCE UNLESS SPECIFIED	±0.3
		PROJECTION	3RD ANGLE
		UNIT	mm
		SCALE	1:1



PIN: NAME	1	WDP
	2	WLD-
	3	VDD
	4	GND
	5	VS
	6	RS
	7	VDD
	8	GND
	9	CLK
	10	GND
	11	DE
	12	B0
	13	B1
	14	B2
	15	B3
	16	B4
	17	B5
	18	G0
	19	G1
	20	G2
	21	G3
	22	G4
	23	G5
	24	R0
	25	R1
	26	R2
	27	R3
	28	R4
	29	R5
	30	RESIST
	31	CS
	32	SCL
	33	SDA
	34	GND
	35	TP-VDD
	36	GND
	37	TP-INT
	38	TP-SDA
	39	TP-SCL
	40	TP-RESIST



8 INTERFACE SIGNAL

Pin No.	Symbol	Description
1	VLED+	LED backlight anode
2	VLED-	LED backlight cathode
3	VDD	Analog power supply
4	GND	Power ground
5	VS	Vertical synchronizing signal input pin
6	HS	Horizontal synchronizing signal input pin
7	VDD	Analog power supply
8	GND	Power ground
9	PCLK	Pixel clock signal in RGB interface
10	GND	Power ground
11	DE	Data enable signal in RGB I/F mode
12-17	B0-B5	Data bus
18-23	G0-G5	Data bus
24-29	R0-R5	Data bus
30	RESET	Reset signal(low active)
31	CS	Chip select pin
32	SCL	Pixel clock signal input pin
33	SDA	Serial data input pin in serial bus system interface
34	GND	Power ground
35	TP_VDD	TP_VDD
36	GND	Power ground
37	TP_INT	TP_INT
38	TP_SDA	TP_SDA
39	TP_SCL	TP_SCL
40	TP_RESET	TP_RESET




9. ELECTRO-OPTICAL CHARACTERISTICS

Item	Symbol	Condition	Min	Typ	Max	Unit	Note	
Transmittance (w/o polarizer)	T%	$\theta=0^\circ$ $T_a=25^\circ\text{C}$	4.0	4.5	-	%	1	
Contrast ratio	Cr		900	1200	-	-	3	
Response time	Ton+Toff		-	30	35	ms	4	
Surface Luminance	LV		250	300	-	cd/m ²	2	
Viewing angle range	H or V er	Θ_{x+}	80	85	-	deg	5	
		Θ_{x-}	80	85	-	deg		
		Θ_{y+}	80	85	-	deg		
		Θ_{y-}	80	85	-	deg		
CIE(x,y) chromaticity	Red	x	Viewing normal angle $\Theta_x=\Theta_y=0^\circ$ $T_a=25^\circ\text{C}$	Typ -0.03	Typ +0.0 3	-	6	
		y				-		
	Green	x				0.656		-
		y				0.339		-
	Blue	x				0.286		-
		y				0.611		-
	White	x				0.138		-
		y				0.098		-
	x	0.307	-					
	y	0.318	-					

Note 1. Ambient condition: $25^\circ\text{C}\pm 2^\circ\text{C}$, $60\pm 10\%\text{RH}$, under 10 Lux in the darkroom.

Note 2. Measure device: BM-7A (TOPCON), viewing cone= 2°

L_v = Average Surface Luminance with all white pixels (P1,P2,P3,P4,P5)

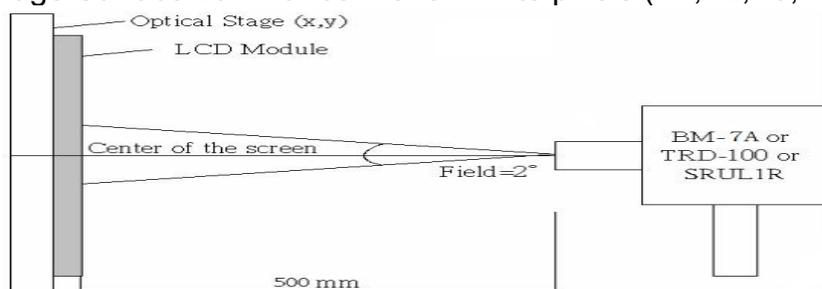


Note 3. Definition of Contrast Ratio:

$$CR = \frac{\text{Average Surface Luminance with all white pixels (P1,P2,P3,P4,P5)}}{\text{Average Surface Luminance with all black pixels (P1,P2,P3,P4,P5)}}$$




Average Surface Luminance with all black pixels (P1,P2,P3,P4,P5)


Note 4. Definition of Response Time (T_{on} , T_{off}), The response time is defined as the time interval between the 10% and 90% amplitudes.

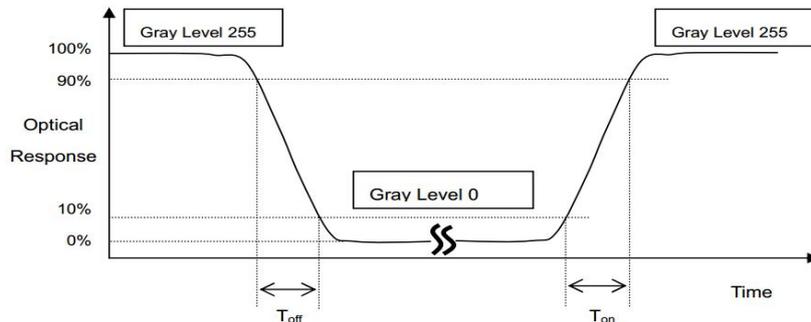

Note 5. Definition of view angle(θ , ψ):

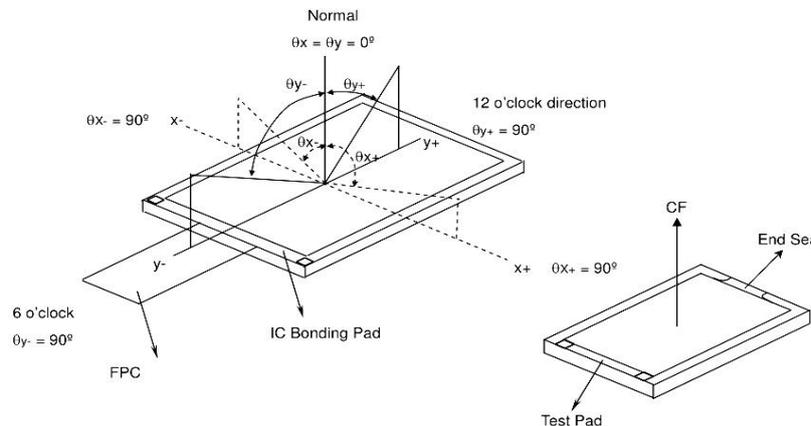

Note 6. The LCD module should be stabilized at a given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 20 minutes in a windless room. Measuring method for Contrast ratio, surface luminance, Luminance uniformity, CIE(x,y) chromaticity.

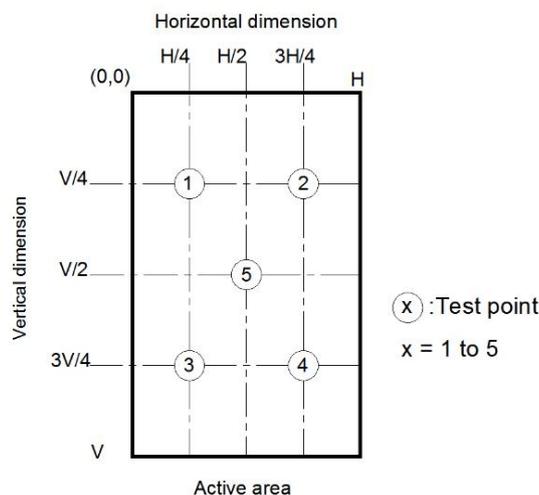

Light spot size $\varnothing = 7\text{mm}$, 500mm distance from the LCD surface to detector lens measurement instrument is TOPCON's luminance meter BM-7



10 RELIABILITY TEST

Reliability test conditions (Polarizer characteristics null)

No.	Items	Condition	Inspection after test
1	High Temperature Storage	T = 80°C ± 2°C for 48 hr	Inspection after 4 hours storage at room temperature, the sample shall be free from defects: 1. Air bubble in the LCD 2. Sealleak; 3. Non-display; 4. missing segments; 5. Glass crack; 6. Current Idd is twice higher than initial value.
2	Low Temperature Storage	T = -30°C ± 2°C for 48 hr	
3	High Temperature Operating	T = 70°C ± 2°C for 48 hr	
4	Low Temperature Operating	T = -20°C ± 2°C for 48 hr (But no condensation of dew)	
5	High Temp. and High Humidity Operating	T = 60°C ± 5°C /90% for 48 hr (But no condensation dew)	
6	Thermal Shock	-30±2°C~25~80±2°C×10cycles (30min.) (5min.) (30min.)	
7	Dropping test (non-operation)	Drop to the ground from 76cm height, one time, every side of carton. (Packing condition)	
8	Packing Vibration (non-operation)	Frequency: 10Hz~55Hz~10Hz Amplitude: 1.0mm, X, Y, Z direction for total 3hours (Packing condition)	
9	ESD	Touch:6KV,Air: 10KV .R: 330Ω C: 150pF Air discharge, 10time	

Note:

- (1) The test samples should be applied to only one test item.
- (2) Sample size for each test item is 5~10pcs.
- (3) In case of malfunction defect caused by ESD damage, if it would be recovered to normal state after resetting, it would be judge as a good part.
Using ionizer(an antistatic blower) is recommended at working area in order to reduce electro-static voltage.
When removing protection film from LCM panel, peel off the tag slowly (recommended more than one second) while blowing with ionizer toward the peeling face to minimize ESD which may damage electrical circuit.
- (4) Please use automatic switch testing mode when test operating mode.



11 INSPECTION CRITERION

This specification is made to be used as the standard acceptance/rejection criteria for Normal LCM Product.

1 Sample plan

Sampling plan according to GB/T2828.1-2003/ISO 2859-1: 1999 and ANSI/ASQC Z1.4-1993, normal level 2 and based on:


Major defect: AQL 0.65

Minor defect: AQL 1.0

2. Inspection condition

Viewing distance for cosmetic inspection is about 30cm with bare eyes, and under an environment of 20~40W light intensity, all directions for inspecting the sample should be within 45° against perpendicular line. (Normal temperature 20~25°C and normal humidity 60±15%RH).

3. Definition of inspection zone in LCD.

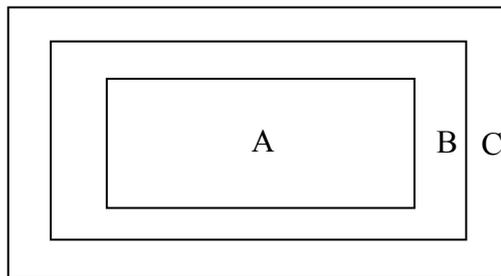

Zone A: character/Digit area

Zone B: viewing area except Zone A (Zone A + Zone B=minimum Viewing area)

Zone C: Outside viewing area (invisible area after assembly in customer's product)

Fig.1 Inspection zones in an LCD.

Note: As a general rule, visual defects in Zone C are permissible, when it is no trouble for quality and assembly of customer's product.

4. Standards of inspection items


4.1 Major Defect

Item No	Items to be inspected	Inspection Standard	Classification of defects
4.1.1	All functional defects	1.No display	Major
		2.Display abnormally	
		3.Missing vertical, horizontal segment	
		4.Short circuit	
		5. Back-light no lighting, flickering and abnormal lighting.	



4.1.2	Missing	Missing component	
4.1.3	Outline dimension	Overall outline dimension beyond the drawing is not allowed.	
4.1.4	linearity	No more than 1.5%	





4.2 Cosmetic Defect

Item No	Items to be inspected	Inspection Standard			Classification of defects	
4.2.1	Clear Spots Black and white Spot defect Pinhole, Foreign Particle, polarizer Dirt	For dark/white spot, size Φ is defined as $\Phi = (x + y)/2$			Minor	
						
		1				
		Zone	Acceptable Qty			
		Size(mm)	A	B		C
		$\Phi \leq 0.15$	Ignore			
		$0.15 < \Phi \leq 0.20$	2			
	$0.20 < \Phi \leq 0.30$	0				
	$\Phi > 0.30$	0				
	Clear Spots TP Dirt	2			Minor	
		Zone	Acceptable Qty			
		Size(mm)	A	B		C
		$\Phi \leq 0.15$	Ignore			
		$0.15 < \Phi \leq 0.20$	2			
	Dim Spots Circle shaped and dim edged defects	3			Minor	
		Zone	Acceptable Qty			
		Size(mm)	A	B		C
		$\Phi \leq 0.2$	Ignore			
$0.20 < \Phi \leq 0.40$		2				
$0.40 < \Phi \leq 0.60$	0					
$\Phi > 0.60$	0					



Item No	Items to be inspected	Inspection Standard					Classification of defects
4.2.2	Line defect Black line, White line, Foreign material on polarizer	Size(mm)		Acceptable Qty			Minor
		L(Length)	W(Width)	Zone			
				A	B	C	
		Ignore	$W \leq 0.05$	Ignore		Ignore	
		$L \leq 5.0$	$0.05 < W \leq 0.08$	2			
			$W > 0.08$	0			
4.2.2	Foreign material on TP film	The line can be seen after mobile phone in the operating condition:					Minor
		Size(mm)		Acceptable Qty			
		L(Length)	W(Width)	Zone			
				A	B	C	
		Ignore	$W \leq 0.05$	Ignore		Ignore	
		$L \leq 5.0$	$0.05 < W \leq 0.08$	3			
	$W > 0.08$	0					
4.2.3	Dim line defect Polarizer scratch TP film scratch	If the scratch can be seen after mobile phone cover assembling or in the operating condition, judge by the line defect of 4.2.2. If the scratch can be seen only in non-operating condition or some special angle, judge by the following.					Minor
		Size(mm)		Acceptable Qty			
		L(Length)	W(Width)	Zone			
				A	B	C	
		Ignore	$W \leq 0.03$	Ignore		Ignore	
		$5.0 < L \leq 10.0$	$0.03 < W \leq 0.05$	2			
$L \leq 5.0$	$0.05 < W \leq 0.08$	1					
	$W > 0.08$	0					
4.2.4	Polarize Air bubble	Air bubbles between glass & polarizer					Minor
		Size(mm)	Zone	Acceptable Qty			
				A	B	C	
		$\phi \leq 0.20$		Ignore		Ignore	
		$0.20 < \phi \leq 0.3$		2			
$\phi > 0.30$		0					

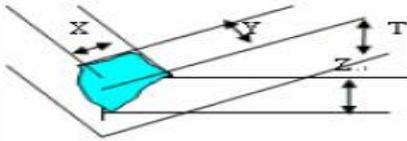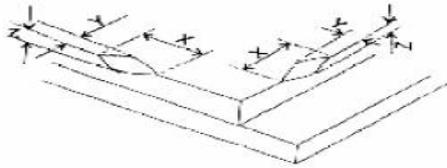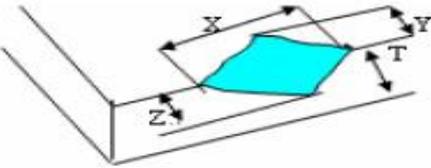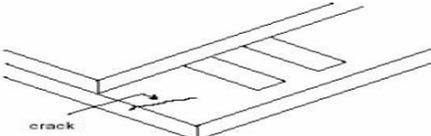

Item No	Items to be inspected	Inspection Standard	Classification of defects						
4.35	Glass defect	(i) Chips on corner A:LCD Glass defect 	Minor						
		<table border="1"> <tr> <td>X(mm)</td> <td>Y(mm)</td> <td>Z(mm)</td> </tr> <tr> <td>≤3.0</td> <td>≤3.0</td> <td>Disregard</td> </tr> </table>		X(mm)	Y(mm)	Z(mm)	≤3.0	≤3.0	Disregard
		X(mm)		Y(mm)	Z(mm)				
		≤3.0		≤3.0	Disregard				
		Notes: S=contact pad length Chips on the corner of terminal shall not be allowed to extend into the ITO pad or expose perimeter seal. B:TP Glass defect 							
		<table border="1"> <tr> <td>X(mm)</td> <td>Y(mm)</td> <td>Z(mm)</td> </tr> <tr> <td>≤3.0</td> <td>≤3.0</td> <td>Disregard</td> </tr> </table>		X(mm)	Y(mm)	Z(mm)	≤3.0	≤3.0	Disregard
		X(mm)		Y(mm)	Z(mm)				
		≤3.0		≤3.0	Disregard				
		(ii)Usual surface cracks A:LCD Glass defect 							
		<table border="1"> <tr> <td>X(mm)</td> <td>Y(mm)</td> <td>Z(mm)</td> </tr> <tr> <td>≤3.0</td> <td><Inner border line of the seal</td> <td>Disregard</td> </tr> </table>		X(mm)	Y(mm)	Z(mm)	≤3.0	<Inner border line of the seal	Disregard
		X(mm)		Y(mm)	Z(mm)				
		≤3.0		<Inner border line of the seal	Disregard				
		B:TP Glass defect 							
		<table border="1"> <tr> <td>X(mm)</td> <td>Y(mm)</td> <td>Z(mm)</td> </tr> <tr> <td>≤6.0</td> <td><2.0</td> <td>Disregard</td> </tr> </table>		X(mm)	Y(mm)	Z(mm)	≤6.0	<2.0	Disregard
		X(mm)		Y(mm)	Z(mm)				
≤6.0	<2.0	Disregard							
(iii) Crack Cracks tend to break are not allowed. 									



12 PRECAUTIONS FOR USE OF LCD MODULES

1. Handling Precautions

- (1) The display panel is made of glass and polarizer. As glass is fragile. It tends to become or chipped during handling especially on the edges. Please avoid dropping or jarring. Do not subject it to a mechanical shock by dropping it or impact.
- (2) If the display panel is damaged and the liquid crystal substance leaks out, be sure not to get any in your mouth. If the substance contacts your skin or clothes, wash it off using soap and water.
- (3) Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary. Do not touch the display with bare hands. This will stain the display area and degraded insulation between terminals (some cosmetics are determined to the polarizer).
- (4) The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully. Do not touch, push or rub the exposed polarizers with anything harder than an HB pencil lead (glass, tweezers, etc.). Do not put or attach anything on the display area to avoid leaving marks on. Condensation on the surface and contact with terminals due to cold will damage, stain or dirty the polarizer. After products are tested at low temperature they must be warmed up in a container before coming is contacting with room temperature air.
- (5) If the display surface becomes contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If it is heavily contaminated, moisten cloth with one of the following solvents
 - Isopropyl alcohol
 - Ethyl alcoholDo not scrub hard to avoid damaging the display surface.
- (6) Solvents other than those above-mentioned may damage the polarizer. Especially, do not use the following.
 - Water
 - Ketone
 - Aromatic solventsWipe off saliva or water drops immediately, contact with water over a long period of time may cause deformation or color fading. Avoid contacting oil and fats.
- (7) Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.
- (8) Install the LCD Module by using the mounting holes. When mounting the LCD module make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the I/O cable or the backlight cable.
- (9) Do not attempt to disassemble or process the LCD module.
- (10) NC terminal should be open. Do not connect anything.
- (11) If the logic circuit power is off, do not apply the input signals.



- (12) Electro-Static Discharge Control, Since this module uses a CMOS LSI, the same careful attention should be paid to electrostatic discharge as for an ordinary CMOS IC. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
- Before remove LCM from its packing case or incorporating it into a set, be sure the module and your body have the same electric potential. Be sure to ground the body when handling the LCD modules.
 - Tools required for assembling, such as soldering irons, must be properly grounded. Make certain the AC power source for the soldering iron does not leak. When using an electric screwdriver to attach LCM, the screwdriver should be of ground potentiality to minimize as much as possible any transmission of electromagnetic waves produced sparks coming from the commutator of the motor.
 - To reduce the amount of static electricity generated, do not conduct assembling and other work under dry conditions. To reduce the generation of static electricity be careful that the air in the work is not too dried. A relative humidity of 50%-60% is recommended. As far as possible make the electric potential of your work clothes and that of the work bench the ground potential
 - The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated
- (13) Since LCM has been assembled and adjusted with a high degree of precision, avoid applying excessive shocks to the module or making any alterations or modifications to it.
- Do not alter, modify or change the shape of the tab on the metal frame.
 - Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.
 - Do not damage or modify the pattern writing on the printed circuit board.
 - Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector.
 - Except for soldering the interface, do not make any alterations or modifications with a soldering iron.
 - Do not drop, bend or twist LCM.

2. Storage precautions

- 2.1 When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.
- 2.2 The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:
- Temperature : 0°C ~ 40°C Relatively humidity: ≤80%
- 2.3 The LCD modules should be stored in the room without acid, alkali and harmful gas.
- 2.4 The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.

----- END